



WITH LTE-8 PROOFER



WITH LTS-8 SUPPORT



LABE LT-4-H DIGITAL PL

The Labe LT-4 DIGITAL oven is designed and ready to bake the product facing to the public. It is an electric convection oven for baking with forced air, which provides uniform a baking, using two turbines with reverse rotation.

CHARACTERISTICS

- **Stainless steel structure**
The oven is made of AISI 430 stainless steel, both the inside and the outside of the Labe oven.
- **DIGITAL control panel**
Electronic control panel with 25 different programmes. Each baking programme can control 5 different stages, along with the temperature, steam injection time, damper and duration.
- **Halogen lighting**
- **Lateral opening door**
- **Alarm sound at the end of baking**
- **High quality thermal isolation**
Provided by natural convection cooling, the low emissivity glass and the thermal insulation, which is incorporated in the structure.



COMPOSITION AND TECHNICAL DETAILS

- Adjustable legs
Giving to the user the option of placing the oven at the desired height, providing comfort.
- LT-4-H - DIGITAL PL oven
4 trays of 60 x 40 cm.
Direction / sense: transversal.
Distance between sliders: 80 mm.

LT-4-H-DIGITAL PL data, ■
triphasic or monophasic

	kW	V	A	Hz
I~	6.5 I+N+T	230	27	50/60
3N~	6.5 III+N+T	230/400	23/14	50/60

GENERAL DIMENSIONS

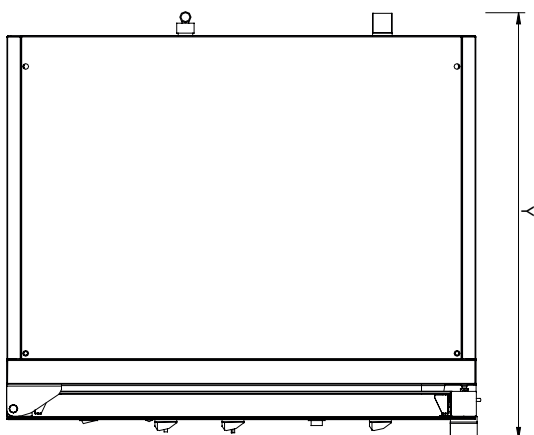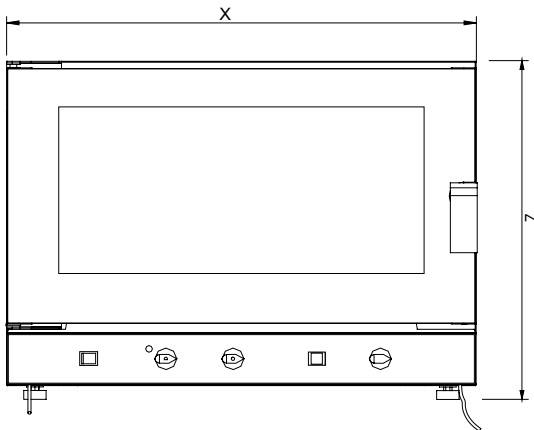

- LT-4-H - DIGITAL PL weight: 80 kg.


X	Y	Z
839 mm	736 mm	613* mm

(*)If a support or a proofer is added, the oven would measure 1492 mm in height.

ACCESORIES

- LTE-8 proofer
 - For fermentation.
 - The structure is made of stainless steel, complying with de CE regulations.
 - Double door.
 - Fitted with humidifying tray.
 - Capacity: 8 trays of 60 x 40 cm.
 - Proofer height: 882 mm.
 - Technical data

INSTALLATIONS IN DETAIL

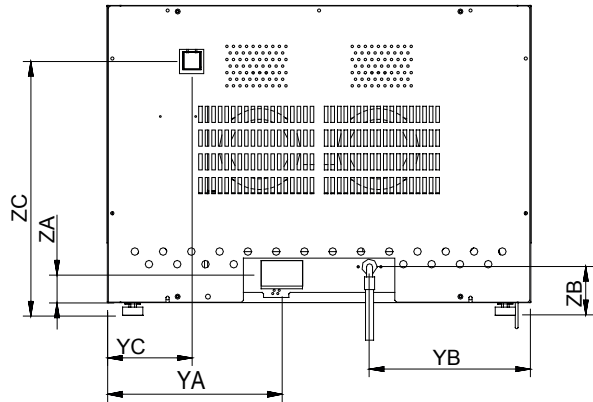

Ⓐ Baking steam outlet

Ⓑ Water supply

The connection to the oven is made by flexible hose terminated in female 3/4" racord (supplied with the oven). The standpipe must have a constant pressure between 1-1.5 kg/cm².

Ⓒ Electric power supply

The electrical connection must be performed by authorized professionals, according to applicable regulations of each country. Available in three phase and single phase.

Facilities location (mm) ■

	X	Y	Z
Ⓐ Baking steam outlet	168	-	503*
Water supply	320	-	96*
Ⓒ Electric power supply	346	-	55*

(*)If a support or a proofer is added, the location of the installations would increase 882 mm in height, the rest would remain the same.

Support LTS-8 ■

- The structure is made of stainless steel, complying with de CE regulations.
- Removable structure with adjustable legs.
- Capacity: 8 trays of 60 x 40 cm.
- Support height: 882 mm